
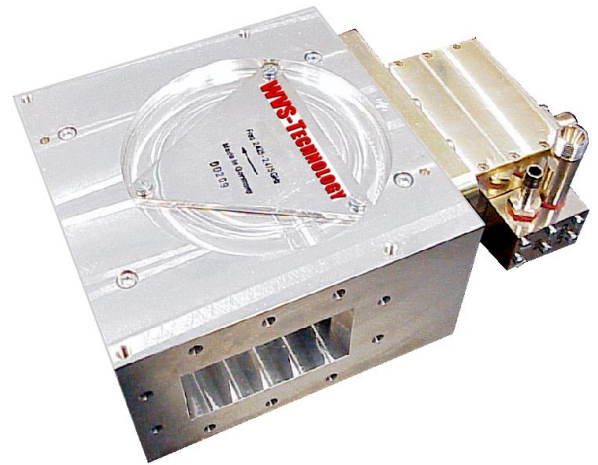


Microwave Isolator

WMI-3K-245

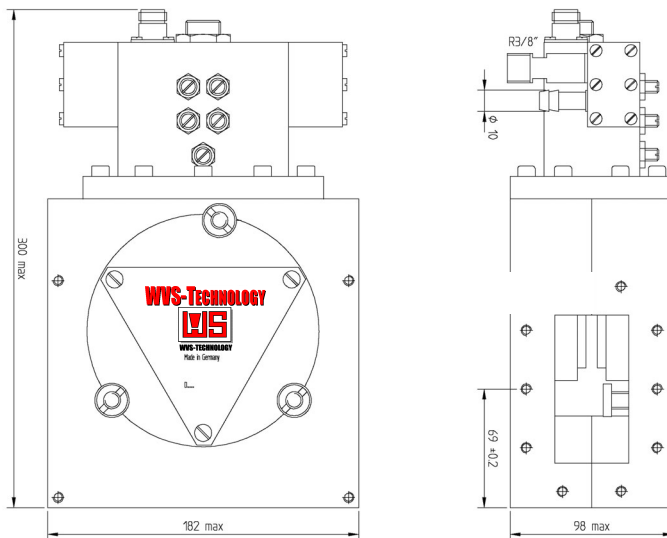

Specifications:

- | | | | |
|----------------------------------|---|--------------------|---|
| - Frequency | : 2425...2475MHz | - Temp. range | : 10...+50°C
(max. 40°C water inlet) |
| - Return loss
(Input& Output) | : min 23dB (matched counter port)
: min 14dB (counter port shortcircuited) | - Monitor coupling | : 66.5 +/- 1dB |
| - Insertion Loss | : max 0.2dB | - Connectors | : Flange IEC PDR 26 |
| - Isolation | : min 23dB | Monitor | : N (1 x female) |
| - Power
(forward) | : 3000W cw | - Dimensions | : 182x300x98 mm |
| - Power
(reflected) | : 3000W cw | | |