
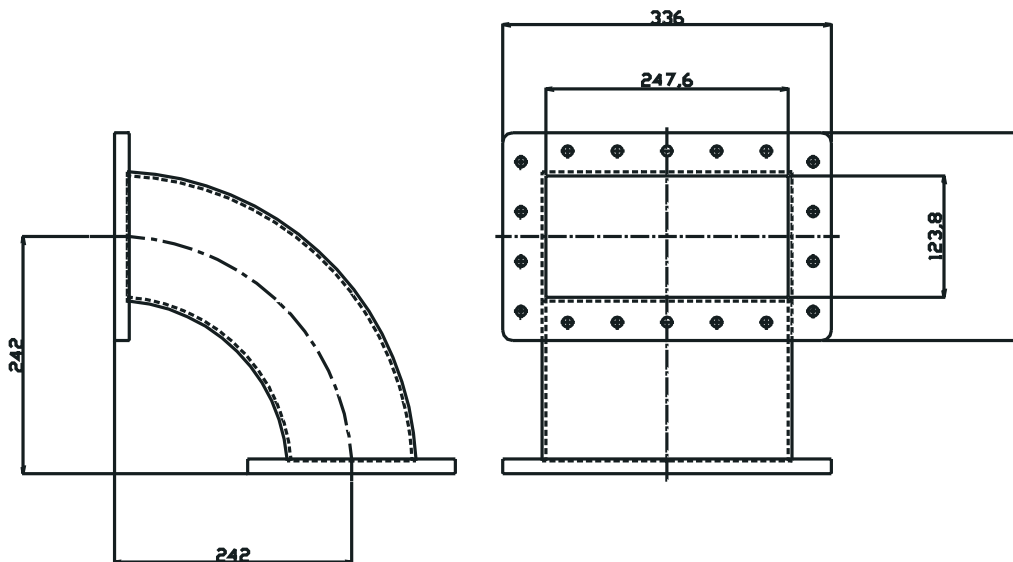


E-Bend 90°

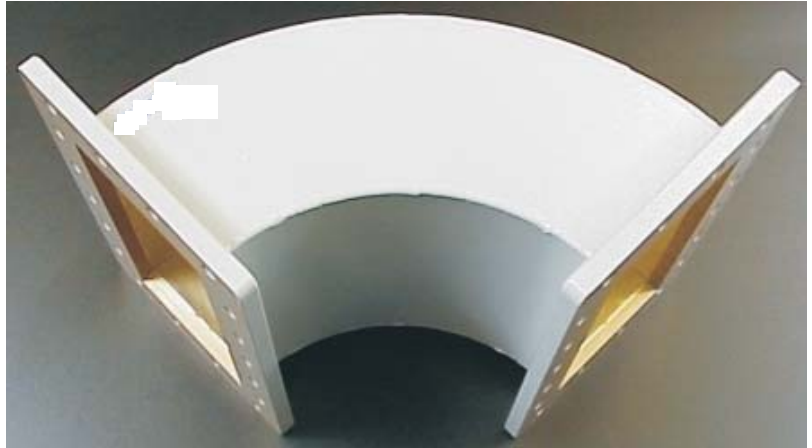


Specification:

- Angle: 90°
- Radius: 242mm
- Frequency: 915MHz +- 25MHz
- Power: 100kW
- Flange: WR975/R9
- Material: aluminium
- Finish: RAL 7035
- Weight: g

Options:


- | | |
|-------------------|-------------------|
| - Material: | - Design: |
| - aluminium | - special flanges |
| - copper | - special finish |
| - brass | - arbitrary angle |
| - stainless steel | - special radius |
| Finish: | |
| - chromated | |
| - etched | |
| - silver plated | |
| - painted | |

H-Bend 90°

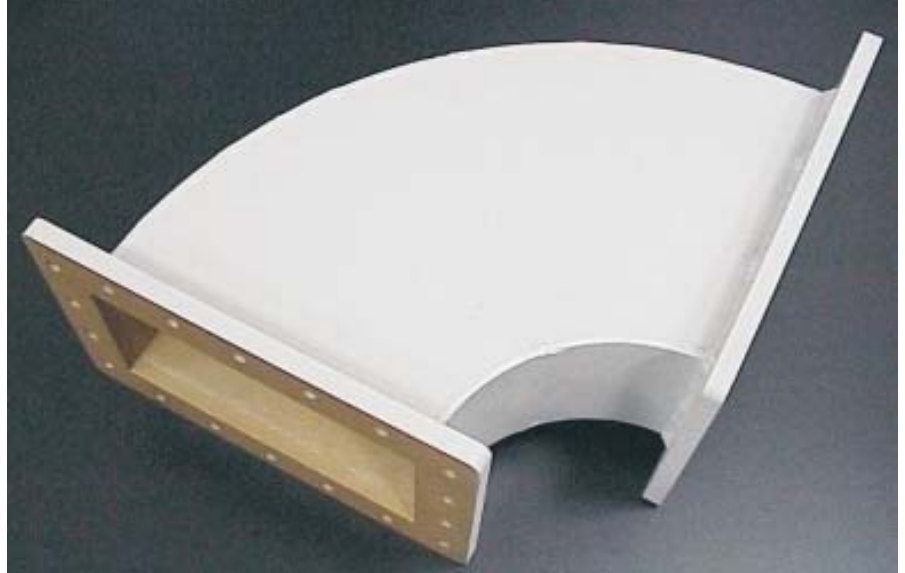

Specifications:

- Angle: 90°
- Radius: 348,5mm
- Frequency: 915MHz / +-25MHz
- Power: 100kW
- Flange: WR975/R9
- Material: aluminium
- Finish: RAL7035
- Weight: g

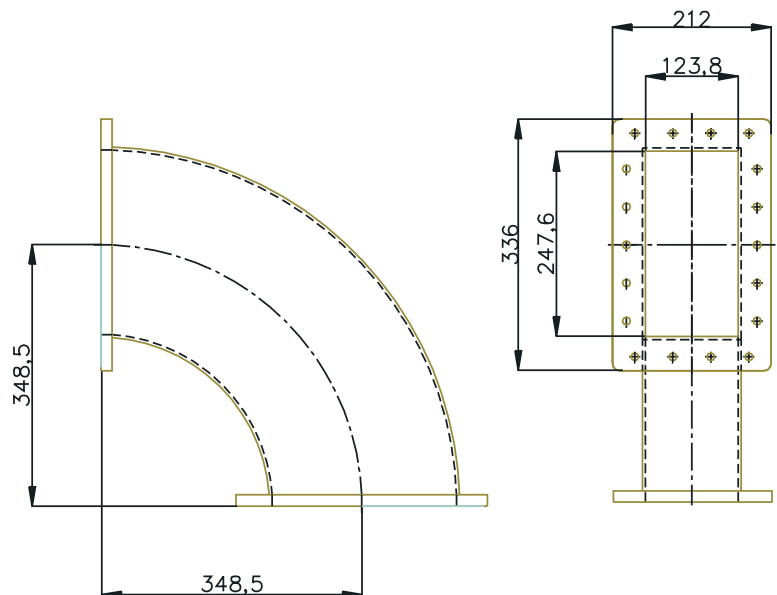

Options:

- | | | |
|--|---|--|
| <ul style="list-style-type: none"> - Material: - aluminium - copper - brass - stainless steel | <ul style="list-style-type: none"> - Design: - special flanges - special finish - arbitrary angle - special radius | <ul style="list-style-type: none"> Finish: - chromated - etched - silver plated - painted |
|--|---|--|

WATER LOAD



Specifications:

- Frequency : 896/915/922MHz
- VSWR : < 1,15
- Power : 100 kW
- Weight : 11 Kg
- Pressure : 8 bar max
- Flow : 1 l/min per 1KW
- Inlet Temp. : 20°C +- 5 °C
- WG-Flange : UDR 9
- Water-connector : hose sleeve 3/4 "

Options:

- special flanges
- special finish

Material

- aluminium

Finish

- chromated
- etched
- yellow chromated
- painted

